









Thank you for purchasing the Office Source Hutch with 2 Doors.
Please follow these instructions for easy assembly.

1  Cam Lock 12 Pcs	2  Klix Cam 12 Pcs	3  Housing Cap (Long) 8 Pcs	4  Housing Cap (Short) 4 Pcs	5  15° Compo Door Hinges 2 Pairs
	6  M4 x 65 Allen-Key 1 Pc	7  18 mm Double Sided Foam Tape 750 mm (L)	8  Door Stopper 2 Pcs	
A  Top Panel	B  Side Panel x 2	C  Fixed Shelf	D  Door Panel x 2	E  Back Panel

KLIX CAM INSTRUCTIONS


1  Line up Cam Lock, turn clockwise.	2  Insert the cam with the arrow pointing towards the hole in the edge.	3  Insert the Cam Lock into Klix Cam. Turn Klix Cam to lock.
---	---	---

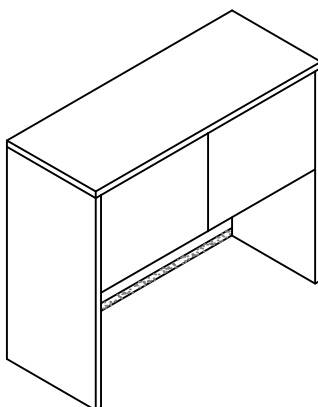

IMPORTANT !!


- Place all wooden parts on a clean and smooth surface such as a rug or carpet to avoid the parts from being scratched.
- Check that you have all parts and hardware.
- Remove all wrapping materials, including staples & packing straps before you start to assemble.
- Do not tighten any screws or bolts until the unit is completely assembled.
- Keep all hardware parts out of reach of children.

1

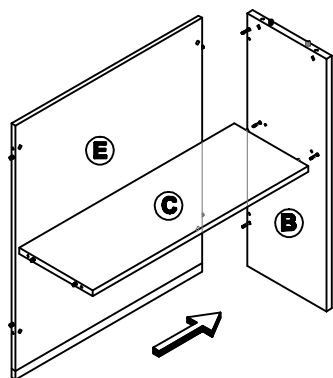


Attach the Fixed Shelf (C) and Back Panel (E) to Side Panel (B) by using Cam Lock (1) and Klix Cam (2).

2

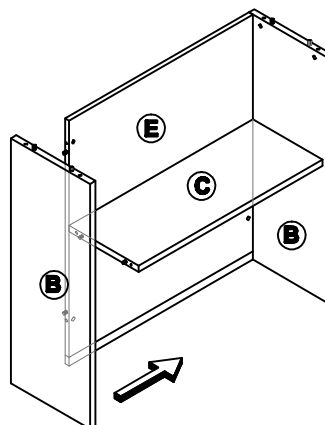


Attach another Side Panel (B) by using Cam Lock (1) and Klix Cam (2).

3

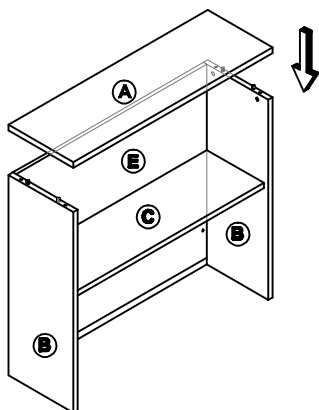


Attach the Top Panel (A) to Side Panel (B) by using Cam Lock (1) and Klix Cam (2).

4

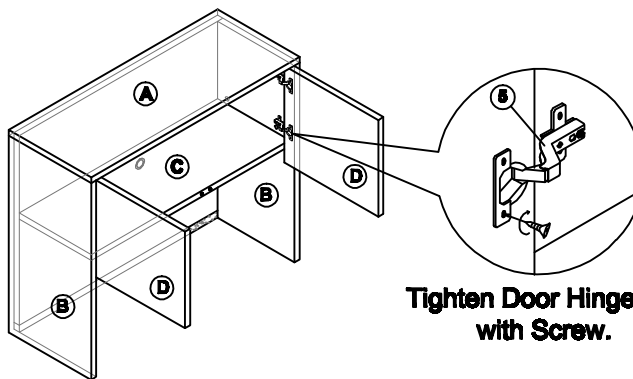


Attach the Doors Panel (D) to the Side Panel (B) with Door Hinges (5).

5

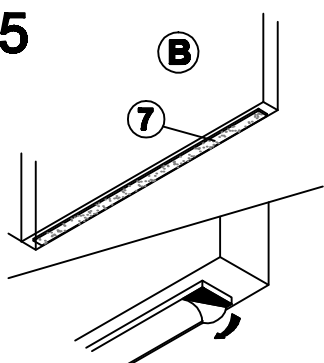


Peel Double Sided Foam Tape (7) and stick it on bottom of Side Panel (B).

6

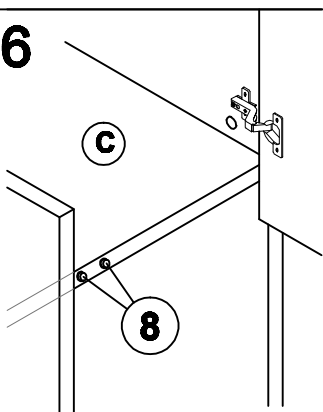

Stick the Door Stopper (8) on the Fixed Shelf (C)

7

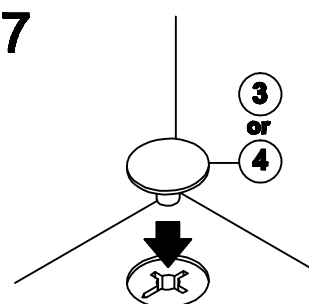

Attach Housing Cap (3 or 4) to all Klix Cam(2) by pushing neck through center of cam.